

HD OB2



HD OB2

General information

Maximum cameras	16
Maximum SloMo positions	4
Dimensions	13 m, 2.5 m, 3.8 m
Dimensions expanded	13 m, 4.1 m, 3.8 m
Operational area	15 m x 6 m
Power requirement	63A CEE (3P+N+E)
Weight	18 t

Mid-sized extendable OB Van
4 separate areas
Up to 13 workspaces
Grass Valley LDX series cameras
Sony MVS-6000 multi-format switcher with a 3ME control panel
Lawo mc² 56 MKII audio console
Riedel Artist 64 intercom system
Mediornet fiber transport system
Sony and Vutrix quad and single monitors
Built in UPS system for all equipment



HD OB2


PRODUCTION AREA

- Sony MVS-6000 Multiformat Switcher
 - 3M/E 32XPT panel
 - AUX Control Panel
 - 49 Input, 24 Output
 - 2.5 M/E
 - 4 Keyers per M/E 2 with 2.5D resizer + 2 DSK
 - 2ch DME
 - 8 Channel internal FrameMemory
- 13x Vutrix 23" Quad monitors, 2x Vutrix 23" Single monitors



VISION CONTROL AREA

- 4x Sony TriMaster OLED 19" Monitors
- 11x Vutrix 10" dual monitors
- 3G / HD / SD Miranda NVISION NV8140 Video router 144x288
- 3x Harris measurement devices
- 4x Imagine Communications X75 frame synchronizers

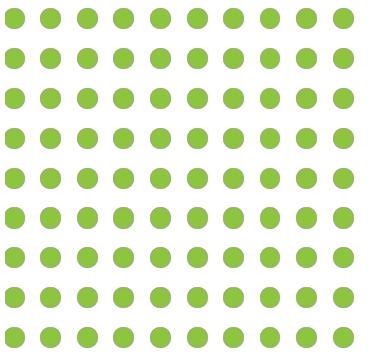


HD OB2

CAMERAS

- Up to 16 cameras
 - Grass Valley LDX80 Première
 - Grass Valley LDX86 SSL camera
 - Vislink INCAM-G Wireless camera with LDX80 camera head
- Fujinon lenses from 14x4.5 to 101x8.9

RECORDING

- Up to 3x EVS XT[3] 12 CH (Channel Max Option)
- EVS IP Director, XT Access
- 1x Sony XDCAM recorder

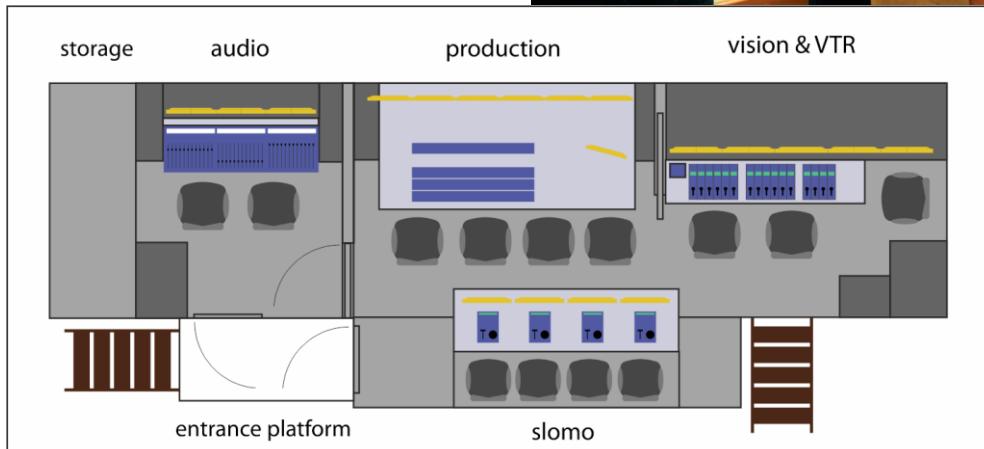

HD OB2

AUDIO SYSTEM

- Lawo mc² 56 MKII audio console
- 3x16 faders
- 3 DSP cards for total 192 full broadcast DSP channels
- 2 external MADI interfaces
- 2x remote Dallis Stageboxes, 24 inputs - 8 outputs each
(redundant PSU, DSP, and fiber connection)
- 1x Vpro8 Video and Audio processor with Dolby E Encoder and Decoder option
- Dynaudio BM 5 Compact 5.1 Loudspeaker System
- Miranda Dolby E Encoder, Dolby E Decoder

INTERCOM

- Riedel Artist 64
- Connect Trio ISDN/Telephone/VOIP (G722) interface
- RiFace G2 2-way radio interface
- Riedel Acrobat CC-8 full duplex wireless Talkback System
- Up to 10 external intercom keypanels

