


HD OB5

DATASHEET



- Small sized OB Van, 10 meter length
- 2 production areas plus audio, slow motion and vision control area
- LDX80 Première, LDX80 Première Incam-G wireless and LDX86 HiSpeed cameras
- Sony MVS-3000 multi-format switcher with 2ME control panel
- Lawo mc² 36 audio console
- Riedel Artist communication system, Medionet fiber transport system
- Kaleido MX multiviewer and Vutrix monitors
- up to 7 workspaces

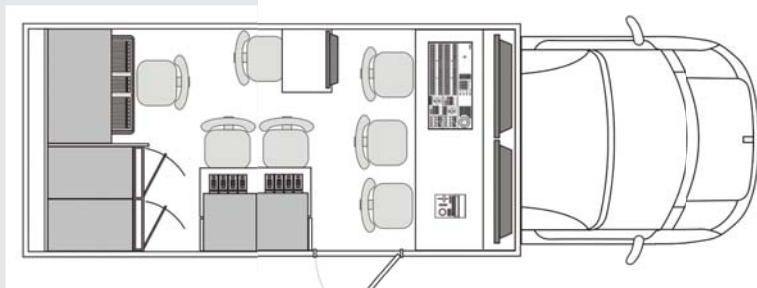

CAMERAS

- 6x GrassValley LDX80 Première
- 1x GrassValley LDX86 SSL camera
- 1x GrassValley LDX80 Première Incam-G wireless camera
- Fujinon lenses from 14x4.3 to 86x9.3

VISION CONTROL AREA

- 2x Vutrix 19" monitor
- 2x dual, 2x 19" Vutrix QUAD monitors
- 3G / HD / SD Miranda NVISION NV8140 Video router 108x126
- 2x Leader measurement devices
- 1x Imagine Communications frame synchronizer (dual)

RECORDERS


- EVS XT[3] Channel max.
- up to 2x VTRs

PRODUCTION AREA

- Sony MVS-3000 Multi-format Switcher with 2M/E 24XPT panel
- 32 input, 16 output
- 2 M/E
- 4 keyers per M/E, two of four keyer with 2.5D
- 2ch DME
- 8 channel internal clipstore
- 2x LCD display with Kaleido MX multiviewer

AUDIO AREA

- Lawo mc² 36 audio console
- 16 faders
- 144 full broadcast DSP channels
- 1x external MADI interface
- 1x remote Compact I/O stagebox , 32 inputs, 32 outputs, AES, MADI connections available
- Vpro8 Video and Audio processor
- Genelec 8020, 8030 Loudspeaker System
- Dolby E decoder
- Intercom
 - Riedel Artist 32
 - Connect Trio ISDN/Telephone interface
 - RiFace G2 2 way radio interface
 - Riedel Acrobat CC-8 full duplex wireless talkback system

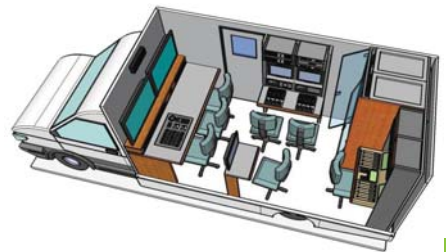

antenna
● ● ● HUNGÁRIA

MORE INFORMATION:

sales@ahrt.hu

+36 1 464 2564